

	Roxolid® SLActive®	Roxolid® SLA®
6 mm	—	—
8 mm	061.3308	061.3508
10 mm	061.3310	061.3510
12 mm	061.3312	061.3512
14 mm	061.3314	061.3514
16 mm	061.3316	061.3516
18 mm	061.3318	061.3518

	Roxolid® SLActive®	Roxolid® SLA®
6 mm	061.4306	061.4506
8 mm	061.4308	061.4508
10 mm	061.4310	061.4510
12 mm	061.4312	061.4512
14 mm	061.4314	061.4514
16 mm	061.4316	061.4516
18 mm	061.4318	061.4518


	Roxolid® SLActive®	Roxolid® SLA®
6 mm	061.5306	061.5506
8 mm	061.5308	061.5508
10 mm	061.5310	061.5510
12 mm	061.5312	061.5512
14 mm	061.5314	061.5514
16 mm	061.5316	061.5516
18 mm	061.5318	061.5518

	Roxolid® SLActive®	Roxolid® SLA®
6 mm	061.6306	061.6506
8 mm	061.6308	061.6508
10 mm	061.6310	061.6510
12 mm	061.6312	061.6512
14 mm	061.6314	061.6514
16 mm	061.6316	061.6516
18 mm	061.6318	061.6518

	Roxolid® SLActive®	Roxolid® SLA®
6 mm	061.7306	061.7506
8 mm	061.7308	061.7508
10 mm	061.7310	061.7510
12 mm	061.7312	061.7512
14 mm	061.7314	061.7514
16 mm	061.7316	061.7516
18 mm	061.7318	061.7518

	Roxolid® SLActive®	Roxolid® SLA®
6 mm	061.8306	061.8506
8 mm	061.8308	061.8508
10 mm	061.8310	061.8510
12 mm	061.8312	061.8512
14 mm	061.8314	061.8514
16 mm	061.8316	061.8516
18 mm	—	—

	Roxolid® SLActive®	Roxolid® SLA®
6 mm	061.9306	061.9506
8 mm	061.9308	061.9508
10 mm	061.9310	061.9510
12 mm	061.9312	061.9512
14 mm	061.9314	061.9514
16 mm	061.9316	061.9516
18 mm	—	—



Drill No. 1 (Pilot Drill)	Ø 2.2 mm
Short, L 34 mm	066.1301
Medium, L 38 mm	066.1501
Long, L 42 mm	066.1701
Alignment Pin	046.799

Drill No. 2	Ø 2.8 mm
Short, L 34 mm	066.1302
Medium, L 38 mm	066.1502
Long, L 42 mm	066.1702
Depth Gauge	046.800

Drill No. 3	Ø 3.2 mm
Short, L 34 mm	066.1303
Medium, L 38 mm	066.1503
Long, L 42 mm	066.1703
Depth Gauge	046.801

Drill No. 4	Ø 3.5 mm
Short, L 34 mm	066.1304
Medium, L 38 mm	066.1504
Long, L 42 mm	066.1704
Depth Gauge	046.802

Drill No. 5	Ø 3.7 mm
Short, L 34 mm	066.1305
Medium, L 38 mm	066.1505
Long, L 42 mm	066.1705
Depth Gauge	046.803

Drill No. 6	Ø 4.2 mm
Short, L 34 mm	066.1306
Medium, L 38 mm	066.1506
Long, L 42 mm	066.1706
Depth Gauge	046.804

Drill No. 7	Ø 4.7 mm
Short, L 34 mm	066.1307
Medium, L 38 mm	066.1507
Long, L 42 mm	066.1707
Depth Gauge	046.805

Drill No. 8	Ø 5.2 mm
Short, L 34 mm	066.1308
Medium, L 38 mm	066.1508
Long, L 42 mm	—
Depth Gauge	046.806

Drill No. 9	Ø 6.2 mm
Short, L 34 mm	066.1309
Medium, L 38 mm	066.1509
Long, L 42 mm	—
Depth Gauge	046.807

RB (Regular Base)



RB/WB Healing Abutments for Crown, AH 2 mm				
	Diameter (Ø)			
GH	Ø 4.0 mm	Ø 5.0 mm	Ø 6.5 mm	Ø 7.5 mm
				
1.5 mm	064.4202S	064.4212S	064.4222S	—
2.5 mm	064.4204S	064.4214S	064.4224S	064.4234S*
3.5 mm	064.4206S	064.4216S	064.4226S	064.4236S*

RB/WB Healing Abutments for Crown, AH 4mm				
	Diameter (Ø)			
GH	Ø 4.0 mm	Ø 5.0 mm	Ø 6.5 mm	Ø 7.5 mm
				
1.5 mm	064.4203S	064.4213S	064.4223S	—
2.5 mm	064.4205S	064.4215S	064.4225S	064.4235S
3.5 mm	064.4207S	064.4217S	064.4227S	064.4237S

RB/WB Healing Abutment for Bridge, AH 2 mm	
	Diameter (Ø)
GH	Ø 5.0 mm
1.5 mm	 064.4232S

RB/WB Healing Abutment for Bridge, AH 4 mm	
	Diameter (Ø)
GH	Ø 5.0 mm
1.5 mm	 064.4233S

RB/WB Anatomic Healing Abutment						
	Diameter (Ø)					
GH	Ø 3.8 mm	Ø 3.8 mm	Ø 3.8 mm	Ø 4.5 mm	Ø 5.5 mm	Ø 6.5 mm
Shapes	S	S1	M	XL	XL	XL
						
1.5 mm	064.4432S	064.4514S	064.4452S	064.4482S	064.4482S	064.4522S
2.5 mm	064.4433S	064.4515S	064.4453S	064.4483S	064.4510S	064.4523S

WB (Wide Base)



RB/WB Healing Abutments for Crown, AH 2 mm				
	Diameter (Ø)			
GH	Ø 4.0 mm	Ø 5.0 mm	Ø 6.5 mm	Ø 7.5 mm
				
1.5 mm	064.4202S	064.4212S	064.4222S	-
2.5 mm	064.4204S	064.4214S	064.4224S	064.4234S*
3.5 mm	064.4206S	064.4216S	064.4226S	064.4236S*

RB/WB Healing Abutments for Crown, AH 4 mm			
	Diameter (Ø)		
GH	Ø 4.0 mm	Ø 5.0 mm	Ø 6.5 mm
			
1.5 mm	064.4203S	064.4213S	064.4223S
2.5 mm	064.4205S	064.4215S	064.4225S
3.5 mm	064.4207S	064.4217S	064.4227S

RB/WB Healing Abutment for Bridge	
AH 2 mm	
	Diameter (Ø)
GH	Ø 5.0 mm
1.5 mm	

RB/WB Healing Abutment for Bridge, AH 4 mm	
	Diameter (Ø)
GH	Ø 5.0 mm
1.5 mm	

WB Healing Abutments for Crown – Wide Profile, AH 2 mm		
	Diameter (Ø)	
GH	Ø6.0 mm	Ø7.5 mm
0.75 mm	 064.8201S	 064.8203S
1.5 mm	 064.8212S	 064.8214S

WB Healing Abutments for Crown – Wide Profile, AH 4 mm		Diameter
GH	Ø 6.0 mm	Ø 7.5 mm
0.75 mm	 064.8202S	064.8204S
1.5 mm	064.8213S	064.8215S

rown	WB Anatomic Healing		Diam
	GH	Ø 5.5 mm	
mm	Shapes	XL	
			
2045	1.5 mm	064.8482S	

Torque Control Device		066.1100
Ratchet		046.119
Holding Key		046.064
Implant depth gauge		066.2000

BL Bone Profiler Kit

BL Bone Profiler 1		026.0022
BL Bone Profiler 2		026.0023
BL Bone Profiler 3		026.0024
Guiding Pin for BLX/BLC Implants		066.0025S

Abutment removal kit


TorxFit™ Removal Tool, for Basal Screw		To push out Abutments, which cannot be removed from the implant due to friction, TAN	065.0007
TorxFit™ Removal Tool, for Basal Screw		For TorxFit™ Basal Screw, left-hand, length 27 mm, stainless steel	065.0008
TorxFit™ Removal Tool, for Basal Screw		For TorxFit™ Basal Screw, left-hand, length 21 mm, stainless steel	065.0009

Selection guide for the Straumann® Modular Cassette and instruments

The Straumann® Modular Cassette Selection Guide helps to define the required Modular Cassette parts and instruments needed for a specific indication. Each chapter includes an order list as well as a set-up overview which shows how to assemble the parts. Art. Nr. 707824


Implant-abutment compatibility		
RB/WB and WB	RB Implants Ø 3.5 - 4.5 mm	WB Implants Ø 5.0 - 6.5 mm
«RB/WB» RB/WB Variobase® for Crown		
«WB» WB Variobase® for Crown		

BLC/BLX Healing Abutment selection Quick Guide
The BLX Healing Abutment selection determines the available options for the final restoration. Therefore, always communicate the implant diameter and the selected healing abutment to the restoring dentist or dental lab in order to facilitate the appropriate final abutment selection.
Straumann® iEXCEL – BLC/BLX Healing Abutment selection Quick Guide (707782/en).

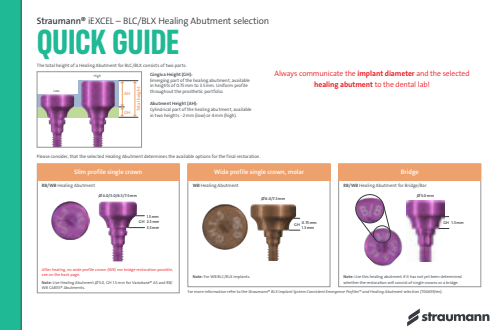


RB/WB prosthetics – fit on all BLX implants (Ø 3.5 mm - Ø 6.5 mm)

- crowns with slim emergence profiles
- bridges

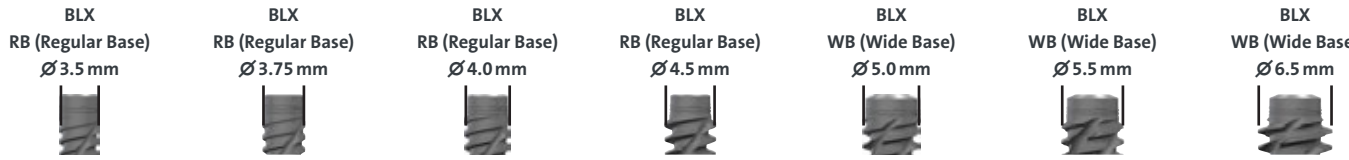

WB prosthetics – fit only on WB implants (Ø 5.0 mm - Ø 6.5 mm)

- crowns with wide emergence profiles

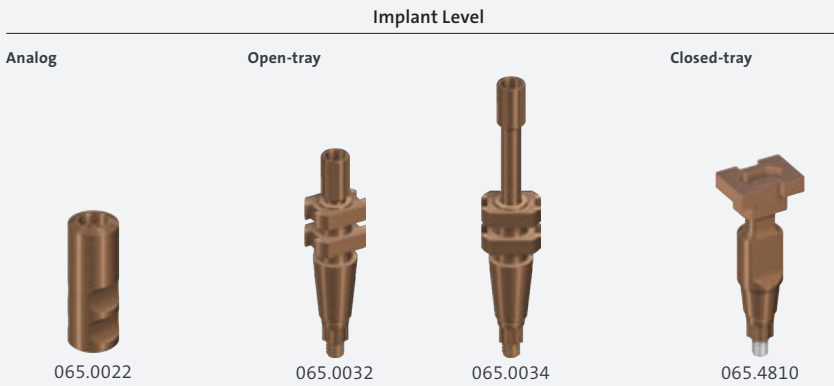

Temporary Titanium Coping for Screw-retained Abutments, Ø 4.6 mm			RB/WB Temporary Abutment, VITA CAD-Temp®				
	Ø 4.6 mm (RB/WB)			GH	1.5 mm	Ø 3.8 mm (RB/WB)	
	Crown	024.0023				Ø 4.5 mm (RB/WB)	
	Bridge	024.0024					
Replacement screw		023.4763					

Temporary Abutments for Crown, AH 10 mm					
		Ø 3.8 mm (RB/WB) Ø 4.5 mm (RB/WB) Ø 6.0 mm (RB/WB)			
	GH	1.5 mm	064.4362	064.4372	–
		2.5 mm	064.4363	064.4373	064.4382
		3.5 mm	064.4364	064.4374	064.4383
		Replacement screw			065.0036

Temporary Abutments for Bridge, AH 10 mm			
	GH	1.5 mm	Ø 4.5 mm (RB/WB)
	Replacement screw		
	065.0036		

Immediate Temporary Abutment for Crown, AH 5.5 mm					
	GH		Ø 3.8 mm (RB/WB)	Ø 4.5 mm (RB/WB)	PMMA Coping
		1.5 mm	064.4322S	064.4332S	 023.0033V2
		2.5 mm	064.4323S	064.4333S	
		3.5 mm	064.4324S	064.4334S	

WB Temporary Abutment, VITA CAD-Temp®			Ø 5.5 mm (WB)
	GH	1.5 mm	064.4390

Temporary Abutments for Crown, AH 11 mm			
	GH		Ø 5.5 mm (WB)
		0.75 mm	064.4391
		1.5 mm	064.4392
Replacement screw			065.0036

Screw-retained Abutments			Ø 4.6 mm (RB/WB)			
			Angle	0°	17°	30°
	GH	0.75 mm	—	—		
		1.5 mm	062.47225			
		2.5 mm	062.47235			
		3.5 mm	062.47245	062.47335	062.47435	
		4.5 mm	062.47255	062.47345	062.47445	
		5.5 mm	—	062.47355	062.47455	
		Replacement screw			065.0036	

RB/WB SRA PLAN Abutment, POM			
	0°	17°	30°
			
	025.0073V4	025.0074V4	025.0075V4

RB/WB Pre-milled Abutment Blanks		
For Medentika Holder, Ø11.5 mm	For Medentika Holder, Ø15.8 mm	For M-Series, Ø12 mm
		
062.4601	062.4602	062.4603

Variobase® for Crown, AH 5.5 mm			Ø 3.8 mm (RB/WB)	Ø 4.5 mm (RB/WB)
	GH	1.5 mm	062.4934	062.4944
		2.5 mm	062.4935	062.4945
		3.5 mm	062.4936	062.4946
Replacement screw			065.0036	

Burn-out Copings for Variobase® for Crown		
	Ø 3.8 mm (RB/WB)	Ø 4.5 mm (RB/WB)
	065.0014	065.0015

Variobase® for Bridge/Bar Cylindrical, AH 3.5 mm			
			Ø 4.5 mm (RB/WB)
	GH	1.5 mm	062.4961
Replacement screw			065.0036

Burn-out Copings for Variobase for Bridge/Bar Cylindrical	
	Ø 4.5 mm (RB/WB)
	065.0017 065.0017V4

Variobase® for Crown AS, AH 5.5 mm			
	GH	1.5 mm	Ø 4.5 mm (RB/WB)
Replacement screw			065.0037

Burn-out Copings for Variobase® for Crown AS	
	Ø 4.5 mm (RB/WB)
	065.0018

Variobase® C		Ø 3.8 mm (RB/WB)		Ø 4.5 mm (RB/WB)	
	GH	1.5 mm	062.4981	062.4982	
		2.5 mm	062.5028	062.5030	
		3.5 mm	062.5029	062.5031	
Replacement screw			065.0036		

Variobase® for Crown, AH 5.5 mm			Ø 5.5 mm (WB)
	GH	0.75 mm	062.4953
		1.5 mm	062.4954
Replacement screw			065.0036

Burn-out Copings for Variobase® for Crown	
	Ø 5.5 mm (WB)
Replacement screw	
065.0016	

Variobase® for Crown AS, AH 5.5 mm			Ø 5.5 mm (WB)
	GH	1.5 mm	062.4971
Replacement screw			065.0037


Burn-out Copings for Variobase® for Crown AS					
	GH	1.5 mm	Ø 5.5 mm (WB)		
Replacement screw					
065.0019					


Variobase® C			Ø 5.5 mm (WB)
	GH	0.75 mm	062.5032
		1.5 mm	062.4983
Replacement screw			065.0036

Burn-out Copings, Plastic		
	Ø 4.6 mm	
	Crown	023.4748
	Bridge	023.4758
	incl. screw 023.4763	


Variobase® for Bridge/Bar Cylindrical	
	Ø 4.6 mm
	023.0028
	incl. screw 023.4763
	Burn-out Coping for Variobase® for Bridge/Bar Cylindrical Coping
	023.0032

Gold Copings		
	Ø 4.6 mm	
	Crown	023.4753
	Bridge	023.4754
	Bar	023.4755
incl. screw 023.4763		

Occlusal Screw					
	GH	1.5 mm	Ø 4.6 mm		
Replacement screw					
023.4763					

Retained Bars and					
	GH	1.5 mm	(RB/WB)		
Replacement screw					
025.0006					

Screw-retained Bars and Bridges					
	GH	1.5 mm	Ø 4.6 mm		
Replacement screw					
023.4752					

Custom Abutments					
	GH	1.5 mm	Ø 4.6 mm		
Replacement screw					
023.4763					

Anatomic Abutments		Ø 6.0 mm (RB/WB)		
	Angle	0°	17°	
	GH	2.5 mm	062.4103	062.4153
		3.5 mm	062.4104	062.4154
	Replacement screw		065.0036	

Gold abutments				Ø 3.8 mm (RB/WB)	Ø 4.5 mm (RB/WB)
	GH	1.5 mm	062.4410	062.4420 (crown) 062.4430 (bridge)	
Replacement screw				065.0036	

Novaloc®				
		Ø 3.8 mm (RB/WB)		
		Angle		
		0°	15°	
	GH	1.5 mm	062.4501	—
		2.5 mm	062.4502	062.4507
		3.5 mm	062.4503	062.4508
		4.5 mm	062.4504	062.4509
		5.5 mm	062.4505	062.4510
		6.5 mm	062.4506	062.4511
		7.5 mm	—	062.4512
Replacement screw		065.0036		

||
||
||